



User Guide

UG001004

AS5070

Adapter Board

AS5070-SO_EK_AB

v2-00 • 2020-Dec-11

Content Guide


1	Introduction	3	5	AS5070-SO_EK_AB Hardware	8
1.1	Kit Content.....	3	5.1	AS5070-SO_EK_AB schematics.....	8
1.2	Ordering Information	3	5.2	AS5070-SO_EK_AB PCB layout.....	8
2	Board Description	4	6	Revision Information	10
2.1	Mounting the AS5070 Adapter Board	5	7	Legal Information.....	11
3	AS5070 Adapter Board and Pinout	6			
4	Operation Case.....	7			
4.1	Connection to AS5xxx-EK-USB-PB UART Programmer.....	7			

1 Introduction

The AS5070 adapter board is a small PCB allowing simple and quick testing or evaluation of the AS5070 magnetic position sensor without the need to design and manufacture an own PCB.

1.1 Kit Content

Figure 1:
AS5070 Adapter Board Kit Content

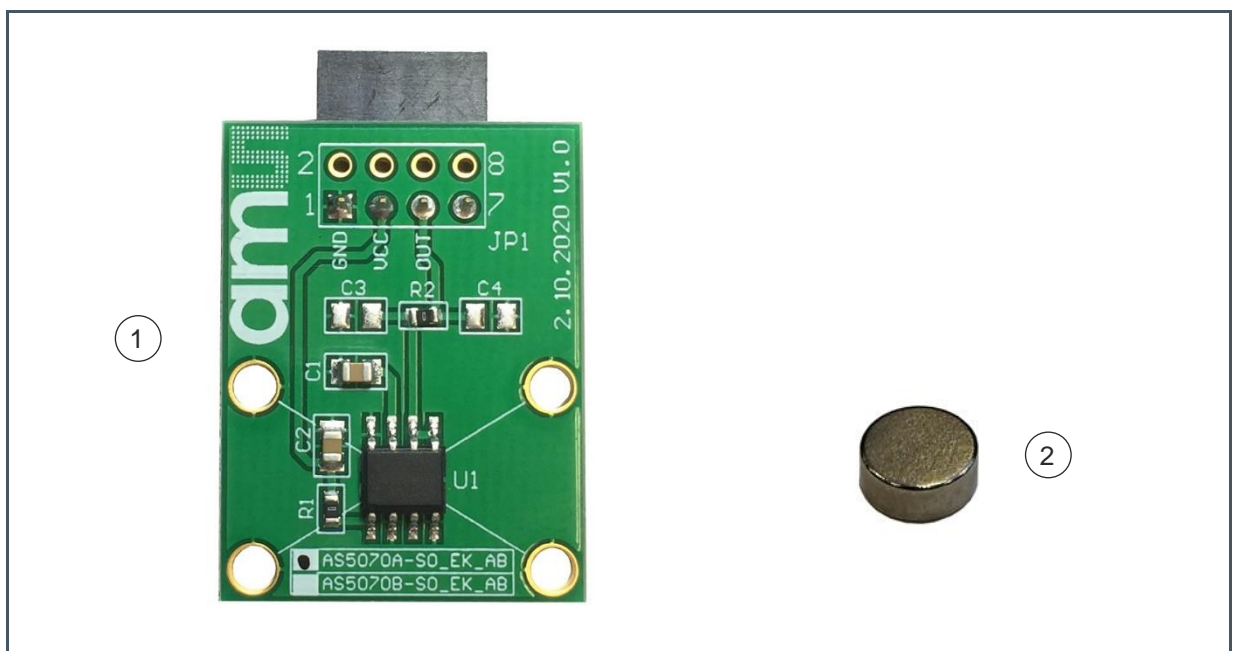

Pos.	Item	Comment
1	AS5070-SO_EK_AB	Adapter board
2	AS5000-MD8H-1	Diametric magnet, D8x2.5mm, NdFeB, Bomatec AG

1.2 Ordering Information

Ordering Code	Description
AS5070-SO_EK_AB	AS5070 Eval Kit Adapter Board


2 Board Description

The PCB can be connected to an external microcontroller or to the AS5xxx-EK-USB-PB UART Programmer which can be used in combination with the AS5070 Software GUI provided by ams AG.

JP1 is populated with a 1x4 female pin header it is required for the power supply (VCC and GND) and output (OUT). This connector directly fits to the UART Programmer.


All necessary external components C1 (VDD3V3-GND) and C2 (VDD-GND) are already populated to the PCB.

Figure 2:
AS5070 Adapter Board

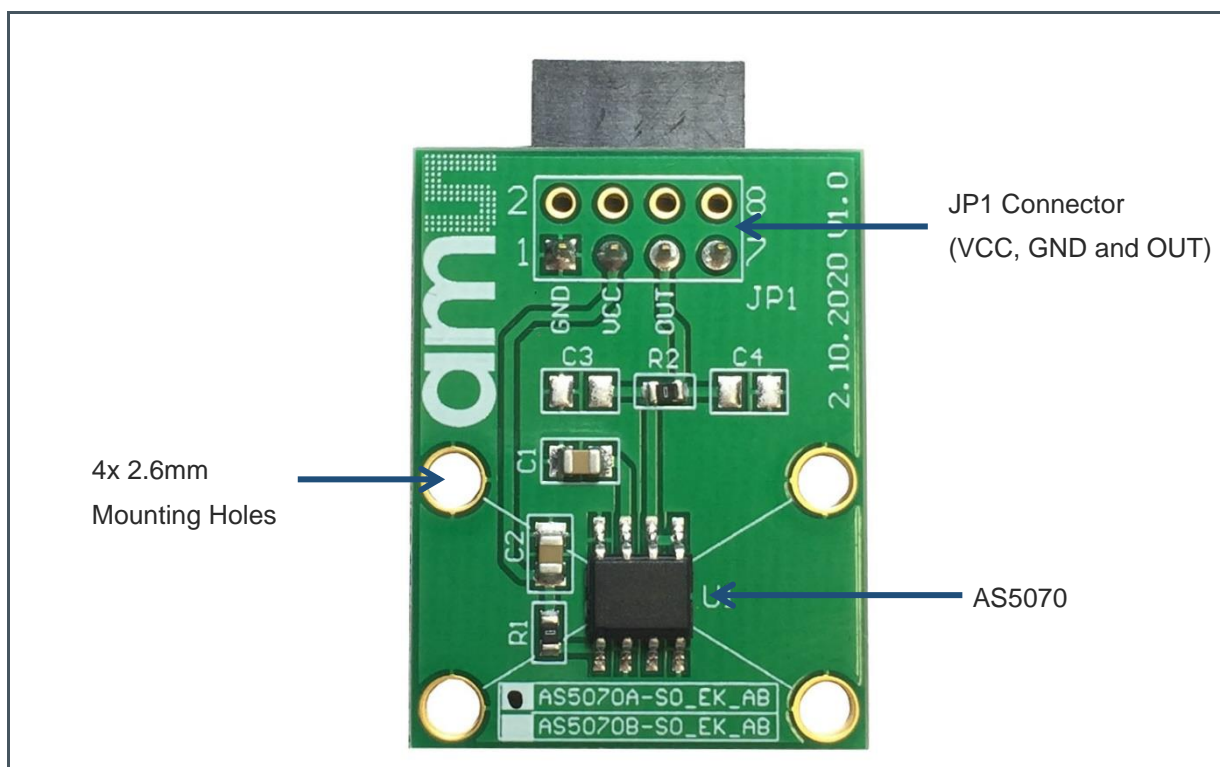

2.1 Mounting the AS5070 Adapter Board

Figure 3:
Mounting and Dimensions

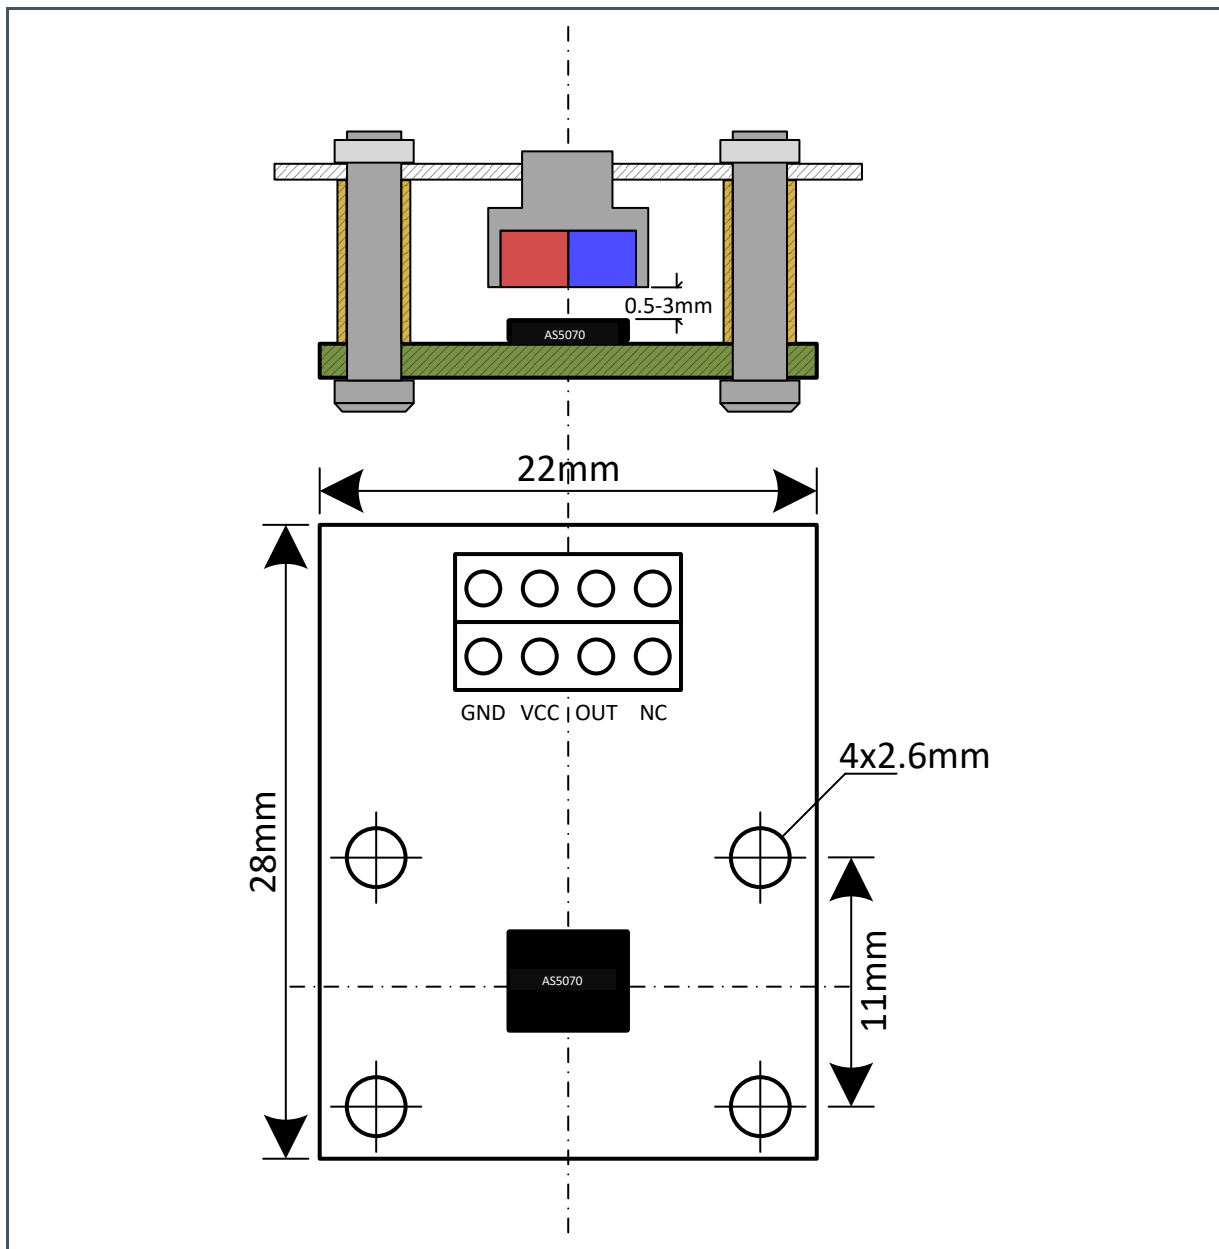

An 8x2.5mm diametric magnet must be placed over or under the AS5070 sensor, and should be centered in the middle of the package with a tolerance of 0.5mm. The airgap between the magnet surface and the package should be maintained in the range 0.5mm to 3mm. The magnet holder must not be ferromagnetic. Materials as brass, copper, aluminum, stainless steel are the best choices to make this part.

3 AS5070 Adapter Board and Pinout

Figure 4:
AS5070 Adapter Board and Sensor Pinout

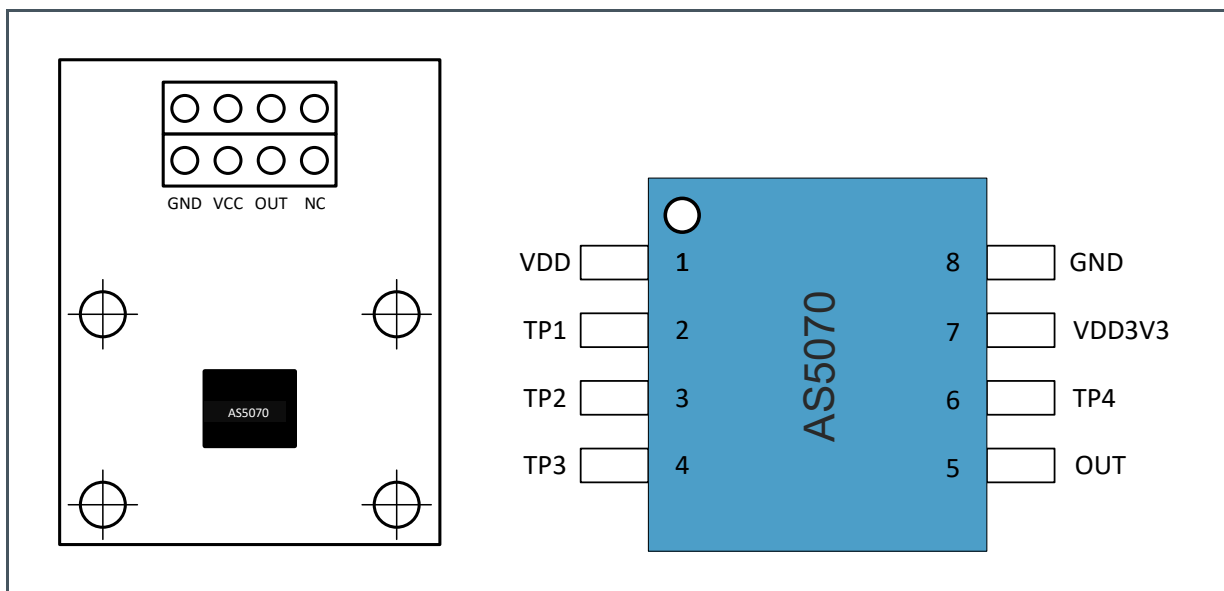


Figure 5:
Pin Description


Pin# Board	Pin# AS5070	Symbol Board	Type	Description
JP1 - 1	8	GND	Power supply	Ground
JP1 - 2		NC		
JP1 - 3	1	VCC	Power supply	Positive supply voltage
JP1 - 4		NC		
JP1 - 5	5	OUT	Analog or digital output	Output (UART in communication mode)
JP1 - 6		NC		
JP1 - 7		NC		
JP1 - 8		NC		

4 Operation Case

4.1 Connection to AS5xxx-EK-USB-PB UART Programmer

The AS5070 adapter board can be directly connected to the AS5xxx-EK-USB-PB UART Programmer using only 3 lines (VDD, GND and OUT). The voltage supply is coming directly from the programmer which can either be supplied directly via 5V from USB or externally. The UART communication is taking place over the OUT pin. The necessary pull-up resistor is already in place on the programmer PCB. For AS5070 always use the BOT (bottom) connector of the programmer as shown in figure below.

Figure 6:
One Device SPI Mode, Unidirectional – 3 Wire

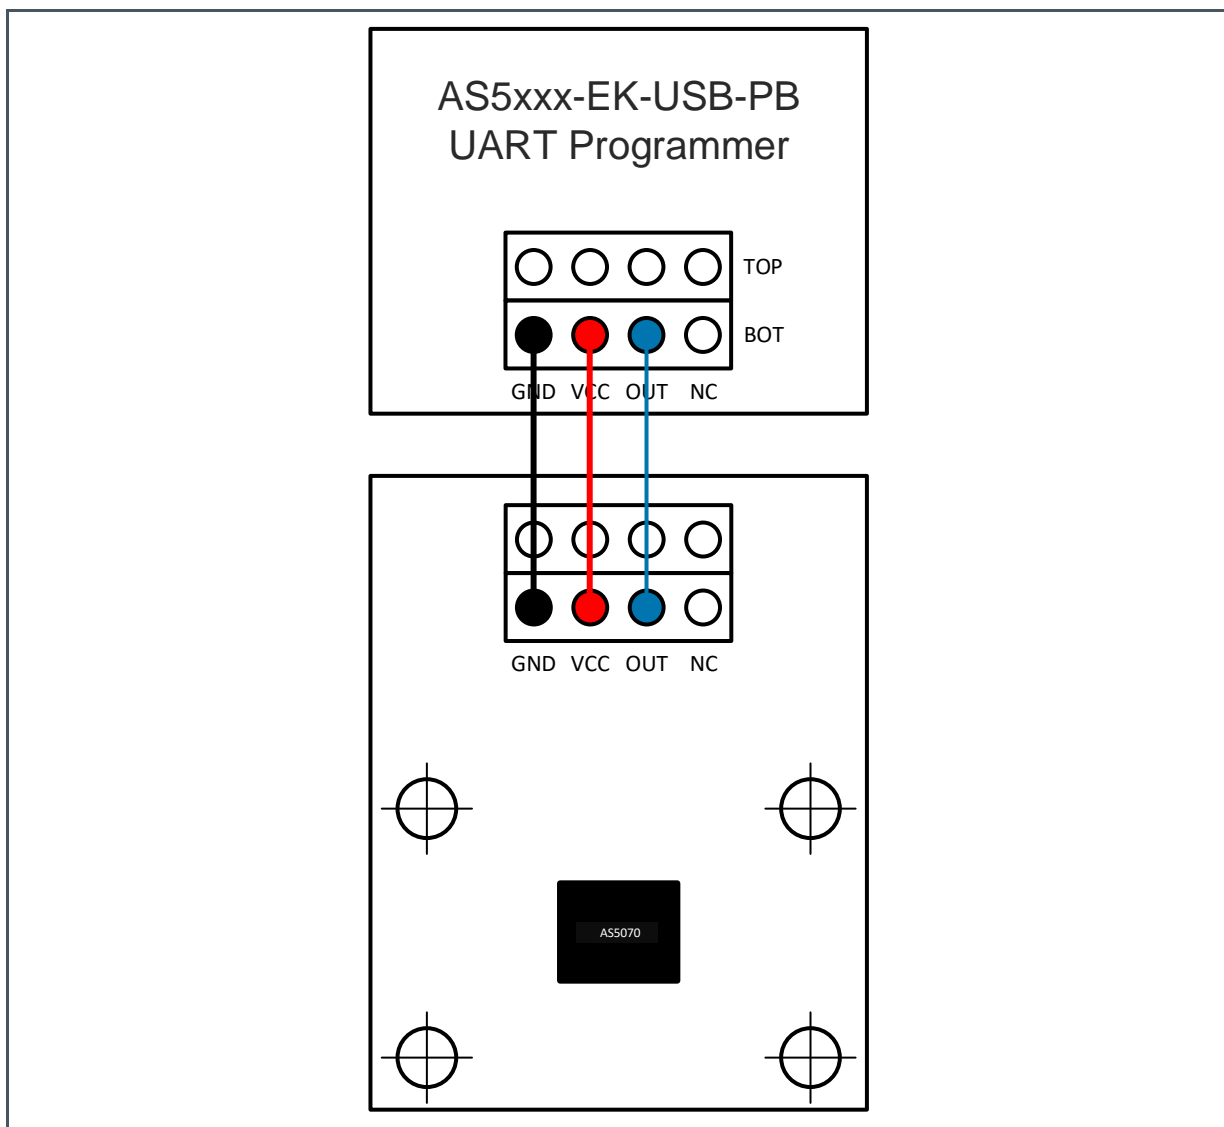


5 AS5070-SO_EK_AB Hardware

5.1 AS5070-SO_EK_AB schematics

The PCB schematic is shown in Figure 7.

Figure 7:
Schematics

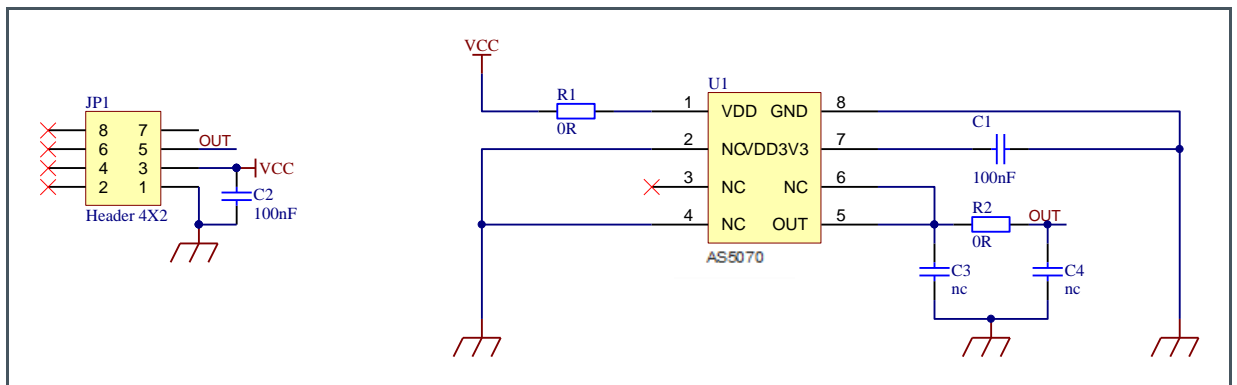

5.2 AS5070-SO_EK_AB PCB layout

The PCB layout is shown in Figure 8 (Top Layer) and Figure 9 (Bottom Layer).

Figure 8:
Top Layer


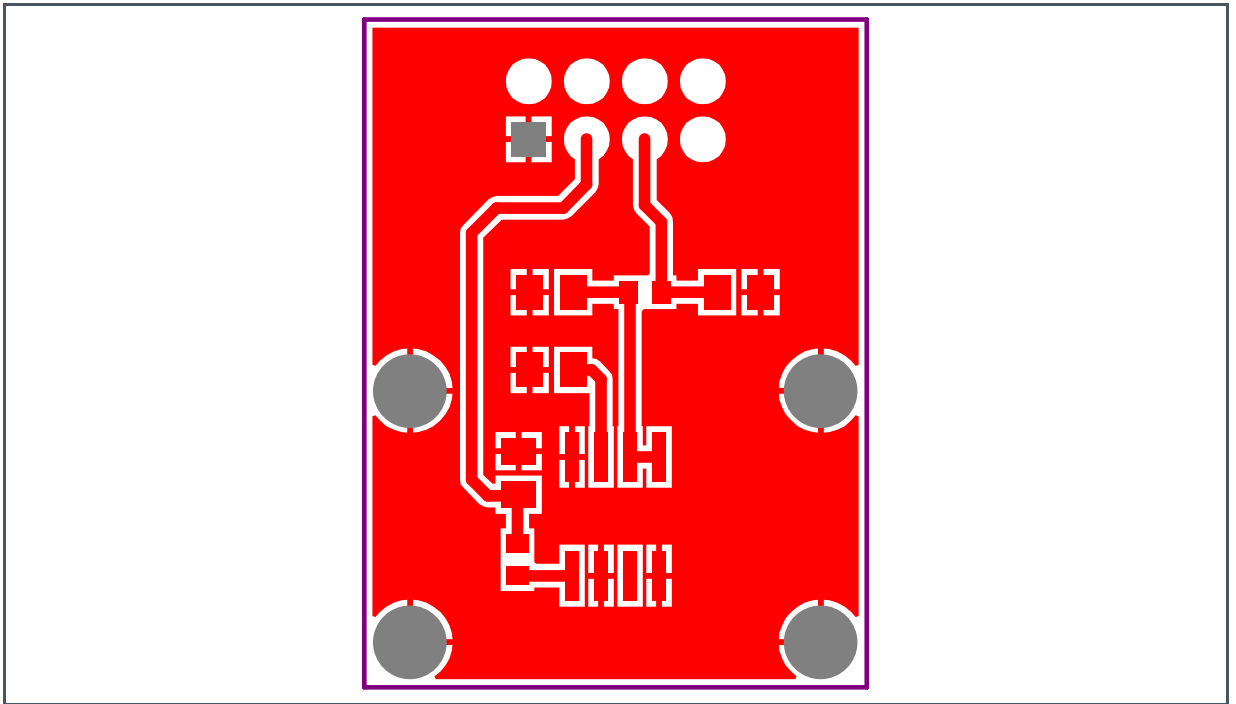


Figure 9:
Bottom Layer

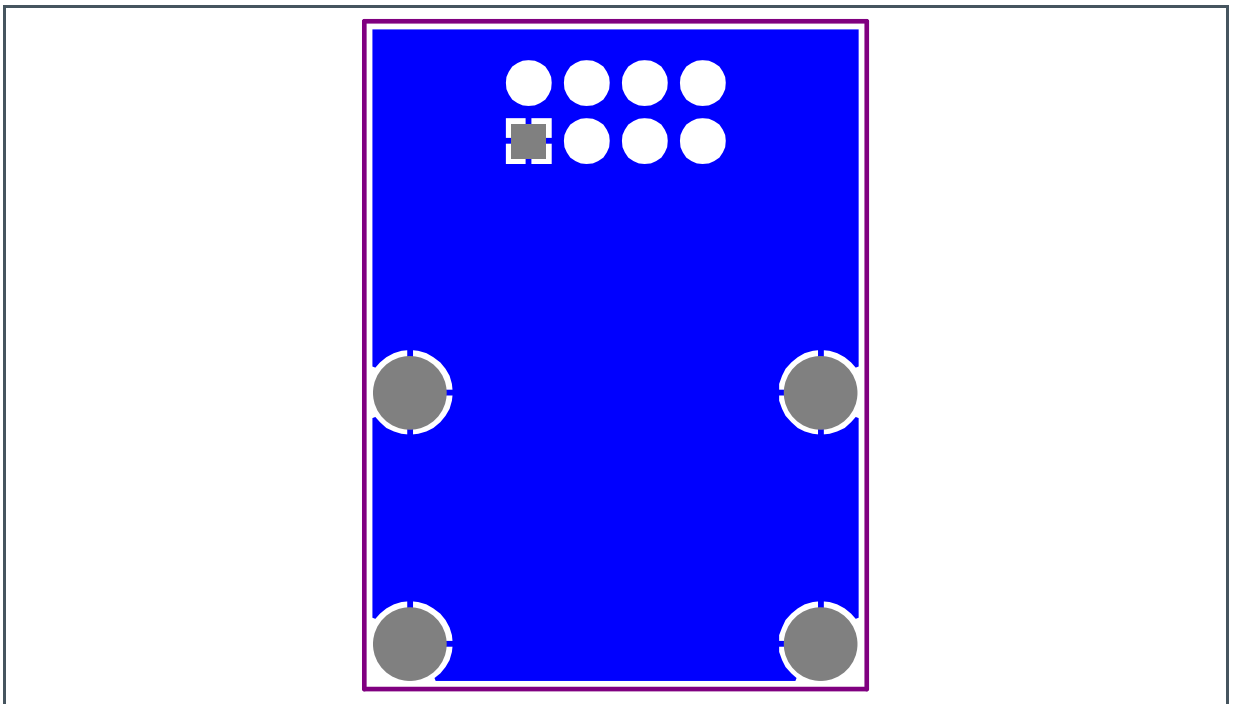

6 Revision Information

Changes from previous version to current revision v2-00	Page
Update to latest template	

- Page and figure numbers for the previous version may differ from page and figure numbers in the current revision.
- Correction of typographical errors is not explicitly mentioned.

7 Legal Information

Copyrights & Disclaimer

Copyright ams AG, Tobelbader Strasse 30, 8141 Premstaetten, Austria-Europe. Trademarks Registered. All rights reserved. The material herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner.

Demo Kits, Evaluation Kits and Reference Designs are provided to recipient on an "as is" basis for demonstration and evaluation purposes only and are not considered to be finished end-products intended and fit for general consumer use, commercial applications and applications with special requirements such as but not limited to medical equipment or automotive applications. Demo Kits, Evaluation Kits and Reference Designs have not been tested for compliance with electromagnetic compatibility (EMC) standards and directives, unless otherwise specified. Demo Kits, Evaluation Kits and Reference Designs shall be used by qualified personnel only.

ams AG reserves the right to change functionality and price of Demo Kits, Evaluation Kits and Reference Designs at any time and without notice.

Any express or implied warranties, including, but not limited to the implied warranties of merchantability and fitness for a particular purpose are disclaimed. Any claims and demands and any direct, indirect, incidental, special, exemplary or consequential damages arising from the inadequacy of the provided Demo Kits, Evaluation Kits and Reference Designs or incurred losses of any kind (e.g. loss of use, data or profits or business interruption however caused) as a consequence of their use are excluded.

ams AG shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interruption of business or indirect, special, incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data herein. No obligation or liability to recipient or any third party shall arise or flow out of ams AG rendering of technical or other services.

RoHS Compliant & ams Green Statement

RoHS Compliant: The term RoHS compliant means that ams AG products fully comply with current RoHS directives. Our semiconductor products do not contain any chemicals for all 6 substance categories plus additional 4 substance categories (per amendment EU 2015/863), including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, RoHS compliant products are suitable for use in specified lead-free processes.

ams Green (RoHS compliant and no Sb/Br/Cl): ams Green defines that in addition to RoHS compliance, our products are free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material) and do not contain Chlorine (Cl) not exceed 0.1% by weight in homogeneous material).

Important Information: The information provided in this statement represents ams AG knowledge and belief as of the date that it is provided. ams AG bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. ams AG has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. ams AG and ams AG suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

Headquarters

ams AG
Tobelbader Strasse 30
8141 Premstaetten
Austria, Europe
Tel: +43 (0) 3136 500 0

Please visit our website at www.ams.com

Buy our products or get free samples online at www.ams.com/Products

Technical Support is available at www.ams.com/Technical-Support

Provide feedback about this document at www.ams.com/Document-Feedback

For sales offices, distributors and representatives go to www.ams.com/Contact

For further information and requests, e-mail us at ams_sales@ams.com