



## Application Note

AN000610

# AS702x AppNote

## Using External Temperature Sensors

v1-00 • 2019-Mar-29

---

# Content Guide

<b>1</b>	<b>Using an External NTC as Temperature Sensor .....</b>	<b>3</b>
<b>2</b>	<b>Revision Information .....</b>	<b>7</b>
<b>3</b>	<b>Legal Information.....</b>	<b>8</b>

# 1 Using an External NTC as Temperature Sensor

The electrical analog front end allows the use of an external resistive divider consisting of a normal resistor and an NTC to sense temperature. For this purpose, we connect the divider between two GPIO pins and GND. The DAC is then set to output 1.9 V to the according GPIO pin e.g. GPIO0 in the drawing. The AFE gain stage is set to 1 and connected to the second GPIO pin (GPIO2 in the drawing) and the sequencer is configured to include the AFE in its sampling.

As a resistive divider we recommend a 100 k NTC together with a 100 k resistor.

**Figure 1:**  
Electrical-Analog-Frontend Configuration for NTC Temperature Sensor

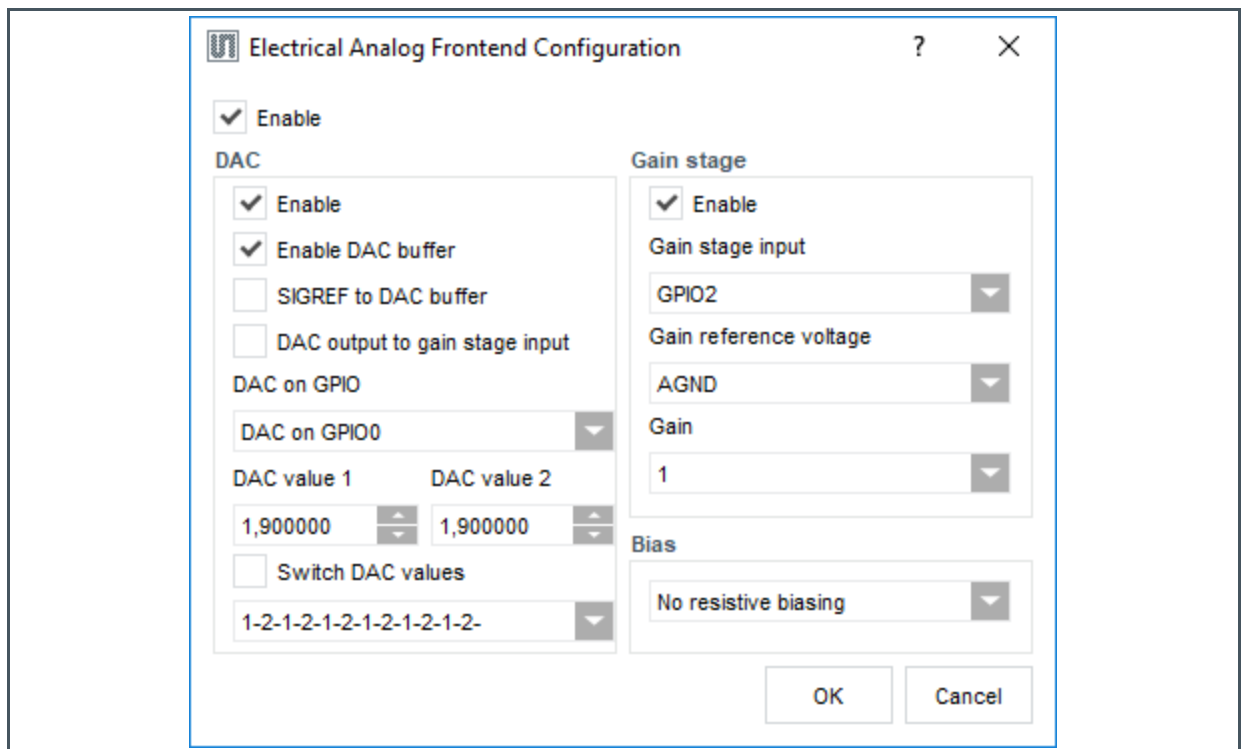


Figure 2:  
Sequencer Configuration for NTC Temperature Sensor



Figure 3:  
Electrical-Analog-Frontend Block Diagram with External NTC (datasheet p.61)

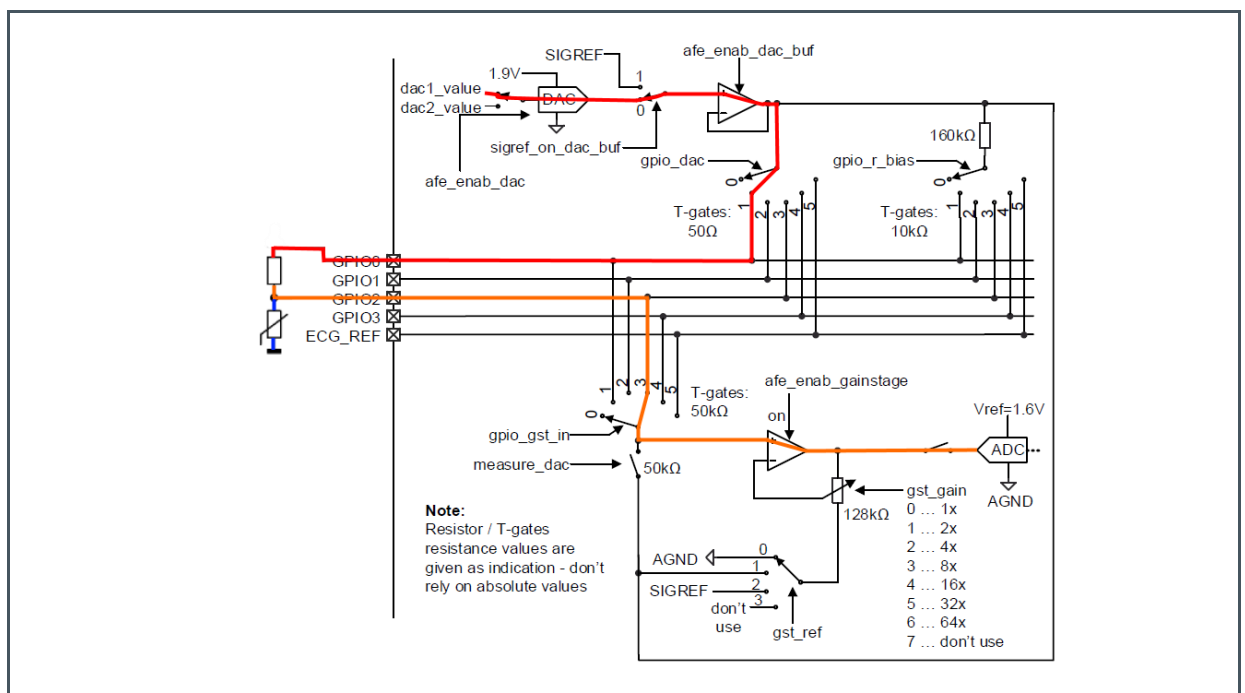


Figure 4:  
Data Displayed in the Electrical Analog Frontend Graph.

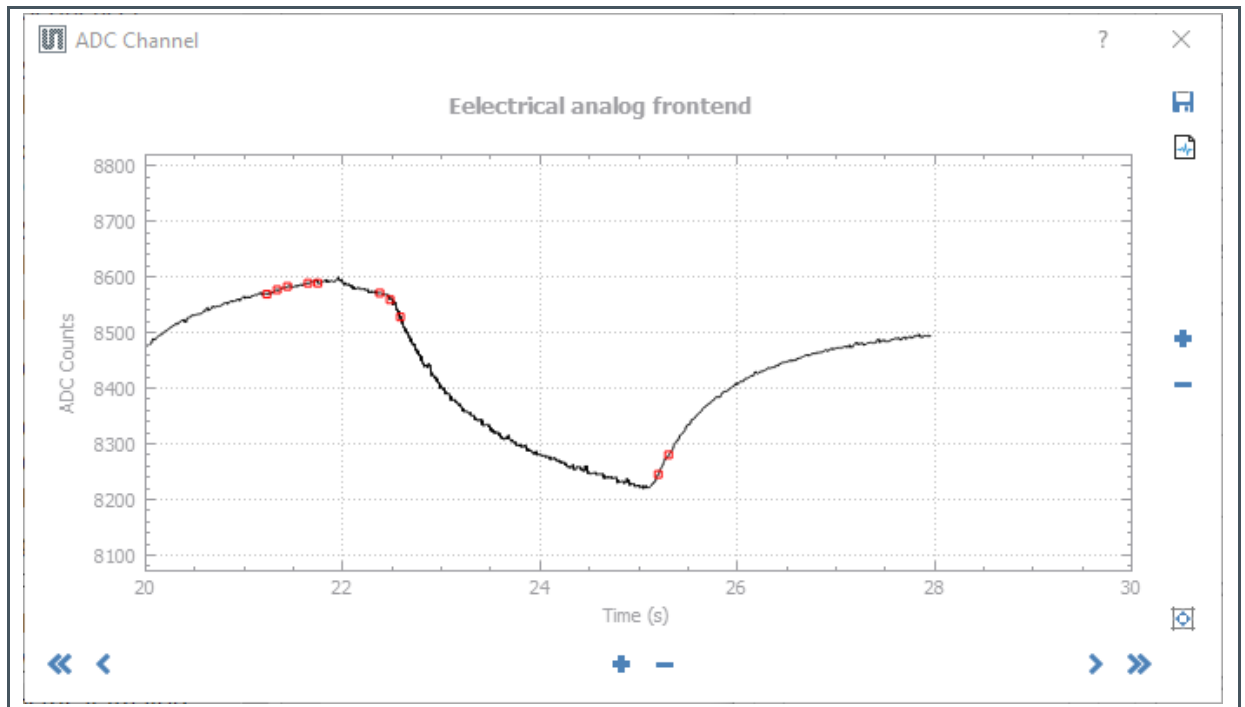


Figure 5:  
Register Settings for NTC Temperature sensor

	Addr.	7	6	5	4	3	2	1	0	Value
EAF_GST	0x80	0	1	1	0	0	0	0	0	0x60
EAF_BIAS	0x81	0	0	0						0x00
EAF_DAC	0x82				0	0	0	0	1	0x01
EAF_DAC1_L	0x83	1	1							0xC0
EAF_DAC1_H	0x84	1	1	1	1	1	1	1	1	0xFF
EAF_DAC2_L	0x85	1	1							0xC0
EAF_DAC2_H	0x86	1	1	1	1	1	1	1	1	0xFF
EAF_DAC_CFG	0x87							0	0	0x00

Temperature changes act on the ADC value according to this formula:

$$R_{NTC} = R_0 \cdot \exp\left(-B \cdot \left(\frac{1}{273 + T_{ref}}\right) - \left(\frac{1}{273 + T_{new}}\right)\right)$$

$$V_{out} = 1.9 \cdot R_{NTC} / (R_{fix} + R_{NTC})$$

$$ADC_{out} = V_{out} / 1.6 \cdot 2^{14}$$

For our example with 100 k NTC and a B of 4190 we end up with

$$V_{out25} = 0.95 \text{ V} = 9728\text{LSB}$$

$$V_{out35} = 0.74 \text{ V} = 7577\text{LSB}$$

There are online tools that help with the calculation like:

<https://www.electro-tech-online.com/tools/thermistor-resistance-calculator.php>

or

<http://www.giangrandi.ch/electronics/NTC/NTC.shtml>

The temperature calculation can be done with these formulas:

**Equation 1:**

$$U_{adc} = \frac{ADC_{lsb} * 1.6}{2^{14}}$$

**Equation 2:**

$$R_{ntc} = \frac{R_{fix} * U_{adc}}{1.6 - U_{adc}}$$

**Equation 3:**

$$T = \frac{1}{\frac{\ln\left(\frac{R_{ntc}}{R_{25}}\right)}{\beta} + \frac{1}{T_{25}}} - T_0$$

R\_f is the fixed resistor (100 k), ADC\_lsb is the digital output in lsb and T0 is 0°C in Kelvin (273).

## 2 Revision Information

Changes from previous version to current revision v1-00	Page
Initial version	

- Page and figure numbers for the previous version may differ from page and figure numbers in the current revision.
- Correction of typographical errors is not explicitly mentioned.

## 3 Legal Information

### Copyrights & Disclaimer

Copyright ams AG, Tobelbader Strasse 30, 8141 Premstaetten, Austria-Europe. Trademarks Registered. All rights reserved. The material herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner.

Information in this document is believed to be accurate and reliable. However, ams AG does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Applications that are described herein are for illustrative purposes only. ams AG makes no representation or warranty that such applications will be appropriate for the specified use without further testing or modification. ams AG takes no responsibility for the design, operation and testing of the applications and end-products as well as assistance with the applications or end-product designs when using ams AG products. ams AG is not liable for the suitability and fit of ams AG products in applications and end-products planned.

ams AG shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interruption of business or indirect, special, incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data or applications described herein. No obligation or liability to recipient or any third party shall arise or flow out of ams AG rendering of technical or other services.

ams AG reserves the right to change information in this document at any time and without notice.

### RoHS Compliant & ams Green Statement

**RoHS Compliant:** The term RoHS compliant means that ams AG products fully comply with current RoHS directives. Our semiconductor products do not contain any chemicals for all 6 substance categories, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, RoHS compliant products are suitable for use in specified lead-free processes.

**ams Green (RoHS compliant and no Sb/Br):** ams Green defines that in addition to RoHS compliance, our products are free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material).

**Important Information:** The information provided in this statement represents ams AG knowledge and belief as of the date that it is provided. ams AG bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. ams AG has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. ams AG and ams AG suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

### Headquarters

ams AG  
Tobelbader Strasse 30  
8141 Premstaetten  
Austria, Europe  
Tel: +43 (0) 3136 500 0

Please visit our website at [www.ams.com](http://www.ams.com)

Buy our products or get free samples online at [www.ams.com/Products](http://www.ams.com/Products)

Technical Support is available at [www.ams.com/Technical-Support](http://www.ams.com/Technical-Support)

Provide feedback about this document at [www.ams.com/Document-Feedback](http://www.ams.com/Document-Feedback)

For sales offices, distributors and representatives go to [www.ams.com/Contact](http://www.ams.com/Contact)

For further information and requests, e-mail us at [ams\\_sales@ams.com](mailto:ams_sales@ams.com)